

IP20 IP44 ADJ. ↷ LED 0-10V DIM ▾




Passive temperature management via heatsinks

Aluminium reflector delivering outstanding performance

205mm adjustable downlight  
 Mounting method : recessed ceiling mounted  
 Material : aluminium housing. Aluminium reflector  
 Standard finishes : matt white / matt black  
 IP Rating : IP20 / IP44  
 Accessories : clear glass / frosted glass / honeycomb louvre  
 Customized RAL upon request.  
 Dimmable driver available upon request.  
 Emergency kit available upon request.

## MAXI ix

Adjustable 15° tilting angle.  
 Completed with Xicato replaceable led module.  
 Remote led driver.  
 Dimension in mm : Ø205 x 197 ; Cut Hole : Ø185

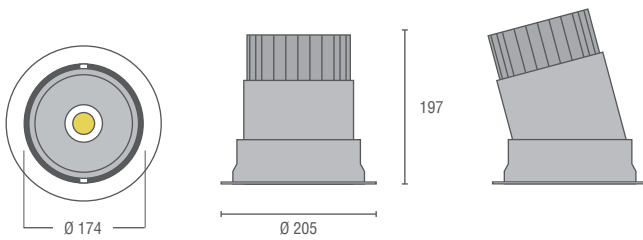

### XICATO LED CRI>80

Wattage	Lumen	CCT	BeamAngle
12W	1100lm	3000K	25°
22W	2000lm	4000K	36°
32W	3000lm	48°	

