

iTROFFER 22

IP20

LED


DIM



600 x 600mm LED batten
Mounting method : recessed ceiling mounted. Powder coated steel housing
Standard finishes : matt white
IP Rating : IP20
Customized RAL upon request.
Dimmable driver available upon request.

iTROFFER 22

Completed with Philips led module.
Integrated led driver.
Dimension in mm : 600 x 600 x 101

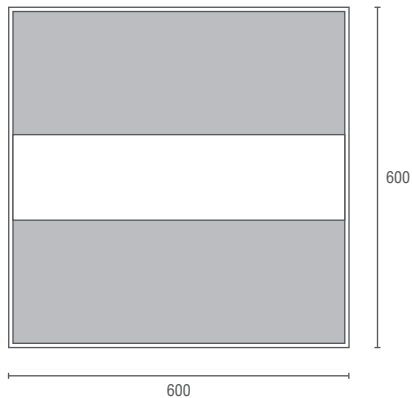

PHILIPS CERTAFLUX LED CRI 80			
Wattage	Lumen	CCT	Beam Angle
25W	3100lm	3000K	120°
36W	4400lm	4000K 6500K	

PHILIPS FORTIMO LED CRI 80			
Wattage	Lumen	CCT	Beam Angle
28W	4400lm	3000K 4000K 6500K	120°