




IP44  LED 0-10V DIM 



PC Diffuser with UV and IR free

LED Linear Light
 Mounting method : ceiling mounted / pendant mounted
 Material : extruded aluminium housing. PC Diffuser
 Standard finishes : aluminium
 IP Rating : IP44
 Customized RAL upon request.
 Dimmable driver available upon request.

Non-adjustable.
 Completed with Philips led module.
 Integrated led driver.
 Dimension in mm : 580 x 70 x 105 (2ft) / 1152 x 70 x 105 (4ft)

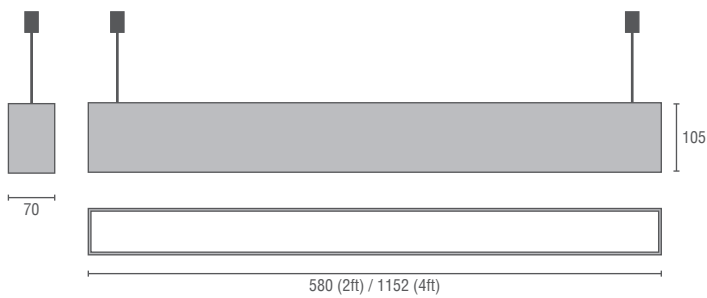

MULTILINE 2FT

PHILIPS LED CRI>80

Wattage	Lumen	CCT	Beam Angle
12.5W	1550lm	3000K	120°
18W	2200lm	4000K	
25W	3100lm	6500K	
36W	4400lm		

MULTILINE 4FT

PHILIPS LED CRI>80

Wattage	Lumen	CCT	Beam Angle
14W	2200lm	3000K	120°
28W	4400lm	4000K	
		6500K	