

IP20 IP44 ADJ. ↘ LED MR16 0-10V DIM ▲



Installation frame. For easy maintenance : without damaging the false ceiling



Passive temperature management via heatsinks



Trimless design in Ø61mm




Adjustable black anti-glare snout and high quality reflector delivering outstanding performance

61mm trimless adjustable downlight
 Mounting method : recessed ceiling mounted
 Material : die cast aluminium housing
 Standard finishes : matt white / matt black / polished chrome / dark chrome / brushed bronze
 IP Rating : P20 / IP44
 Accessories : clear glass / frosted glass / honeycomb louvre
 Customized RAL upon request.
 Dimmable driver available upon request.
 Emergency kit available upon request.



TINY

Adjustable $\pm 15^\circ$ tilting angle.
 Completed with Lumileds replaceable COB led module.
 Remote led driver.
 Dimension in mm : $\varnothing 61 \times 140$; Cut hole : $\varnothing 79$

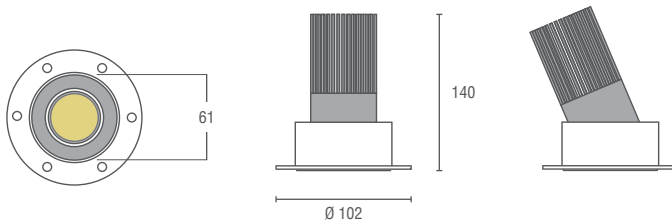


LUMILEDS LED CRI>80

Wattage	Lumen	CCT	Beam Angle
8W	1000lm	2700K	15°
10W	1200lm	3000K	24°
		4000K	38°
		5000K	60°

TINY.MR16

Adjustable $\pm 15^\circ$ tilting angle.
 Completed with GU5.3 lamp base for low voltage halogen lamp or led lamp.
 Electronic transformer is not included.
 Dimension in mm : $\varnothing 61 \times 140$; Cut hole : $\varnothing 79$

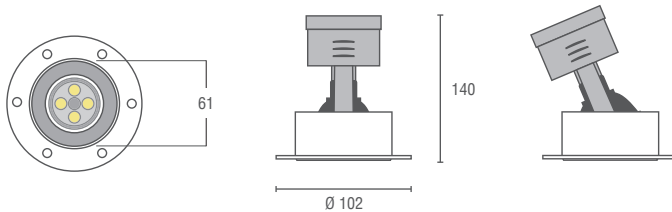

MR16 LOW VOLTAGE HALOGEN / LED LAMP

Lamp Base	Voltage
GU5.3	12V